
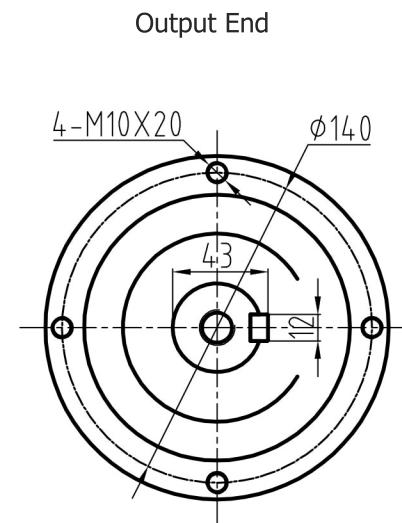

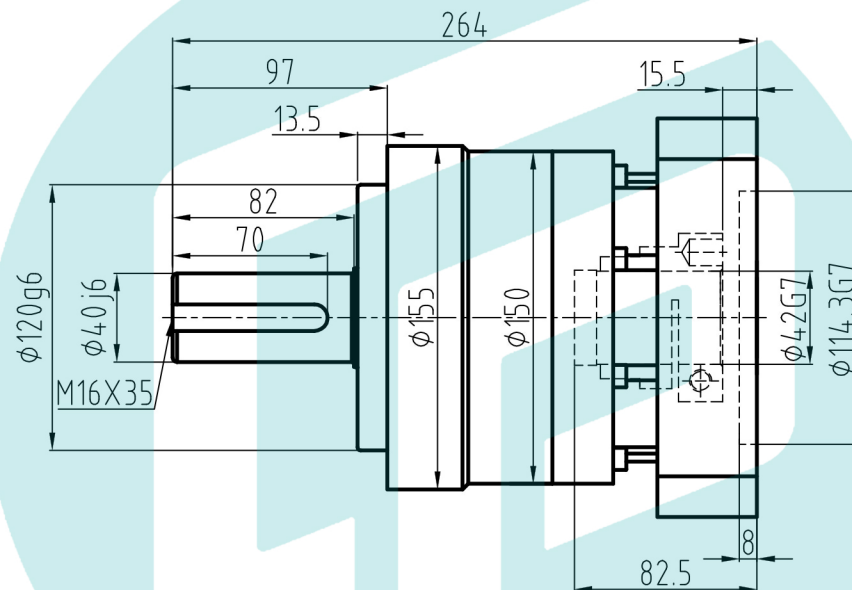


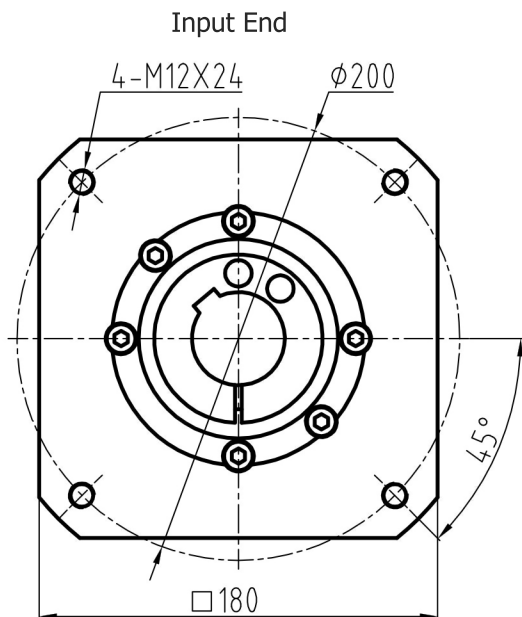

Full-load Efficiency : 98%

Operating Temperature : $-25^\circ \sim +90^\circ$

Rated Input Speed : 2000min^{-1} Maximum Input Speed : 4000min^{-1}

Lubrication Method: Synthetic Grease
 (Long-life Lubrication)

Mounting Position: Any

Average Service Life : 20000h

Backlash : 5 arcmin

Parameter	Transmission Ratio	3	4	5	7	10
Rated Output Torque (Nm)		450	580	540	390	230
Stopping Torque (at Failure) (Nm)		$2 \times \text{Rated Output Torque}$				
Moment of Inertia (Kg·cm ²)		20	15	14	12	11
Permissible Radial Load (N)		5800				
Permissible Axial Load (N)		4500				

SE155-42-L1