

محصولات سانتریفیوژ تاسیساتی

HVAC Centrifugal Products



2025
CATALOGUE

BEB Series Backward Centrifugal Fan

Body material : Galvanized steel

Impeller material : Aluminium

Fan ingress protection: IP54

Insulation class: B

Mode of operation: Continuous operation

Fan application: Extract ventilation of domestic, industrial and commercial premises like bathrooms and showers, domestic kitchen, pools, conference rooms, stores and mechanical rooms.



فن سانتریفیوژ یک طرفه بکوارد

BEB Series Backward Centrifugal Fan

فن سانتریفیوژ یک طرفه بکوارد سری BEB

جنس بدنه فن : فولادی گالوانیزه

جنس پروانه فن : آلومینیوم

درجه حفاظت فن : IP54


کلاس عایق بندی موتور : B

نوع عملکرد موتور : دائم کار

کاربرد فن : تخلیه هوای فضاهای خانگی، صنعتی و تجاری مانند

سرویس های بهداشتی و حمام ها ، آشپزخانه های خانگی ،

استخرها ، سالن اجتماعات ، فروشگاه ها و موتورخانه ها

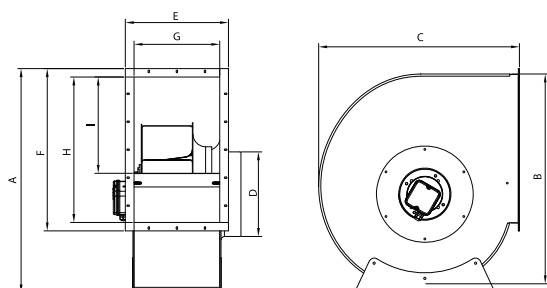

Model	A	B	C	D	E	F	G	H	I
BEB-25/7	510	475	430	200	228	370	166	310	190
BEB-31/10	590	555	500	245	278	440	216	380	240
BEB-40/12	660	620	580	300	325	483	262	422	330
BEB-50/14	800	755	710	390	370	580	305	520	340

ابعاد برحسب میلیمتر ارائه شده است.

میزان بالاترین هوادهی فن (Max Air Flow) مربوط به حالت آزاد (Free Delivery) است.

NO	Model	Fan Diameter (mm)	Voltage (V)	Current (A)-Free	Current (A)-Max	Power (W)-Free	Power (W)-Max	Speed (rpm)	Air flow (m3/h)	IP	Weight (Kg)	Sound Pressure Level* (dBA)
1	BEB-25/7A2S	250x70	220	1	1.25	215	270	2500	1250	54	12	73
2	BEB-25/7A4S	250x70	220	0.6	0.7	90	100	1400	700	54	12	60
3	BEB-25/7A6S	250x70	220	0.55	0.65	110	120	960	500	54	12	51
4	BEB-25/7A4T	250x70	380	0.5	0.55	100	110	1450	750	54	12	60
5	BEB-31/10A4S	310x100	220	1.1	1.2	180	200	1400	1700	54	14.5	63
6	BEB-31/10A6S	310x100	220	0.5	0.6	100	120	920	1150	54	14.5	52
7	BEB-31/10A4T	310x100	380	0.65	0.8	160	190	1430	1750	54	14.5	63
8	BEB-40/12G4S	400x120	220	2.25	2.5	470	500	1350	3300	54	26	72
9	BEB-40/12G6S	400x120	220	1.2	1.3	220	235	950	2450	54	26	62
10	BEB-40/12G4T	400x120	380	1.2	1.4	480	530	1400	3500	54	26	72
11	BEB-50/14R4S	500x140	220	4.55	5	1000	1100	1360	5800	54	39	78
12	BEB-50/14R6S	500x140	220	1.6	1.7	350	360	950	4000	54	39	73
13	BEB-50/14R6T	500x140	380	0.9	1	325	340	960	4000	54	39	73
14	BEB-50/14R4T	500x140	380	1.8	2	920	950	1390	6000	54	39	78

* صدای محصول در فاصله معادل سه برابر قطر محصول (حداقل ۱/۵ متر) اندازه گیری شده است.

